### (19) World Intellectual Property Organization International Bureau





#### (43) International Publication Date 7 April 2005 (07.04.2005)

# **PCT**

## (10) International Publication Number WO 2005/030527 A1

(51) International Patent Classification7: B65D 88/00

B60P 1/64.

(21) International Application Number:

PCT/EP2004/009779

(22) International Filing Date:

2 September 2004 (02.09.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: MI2003A 001834

25 September 2003 (25.09.2003)

(71) Applicant and

(72) Inventor: FENATI, Roberto [IT/IT]; Salita S. Giorgio, 1, I-16034 Portofino (IT).

(74) Agent: MITTLER, Enrico; c/o Mittler & C. s.r.l., Viale Lombardia, 20, I-20131 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declaration under Rule 4.17:


of inventorship (Rule 4.17(iv)) for US only

#### Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTAINER FOR THE TRANSPORT OF GOODS

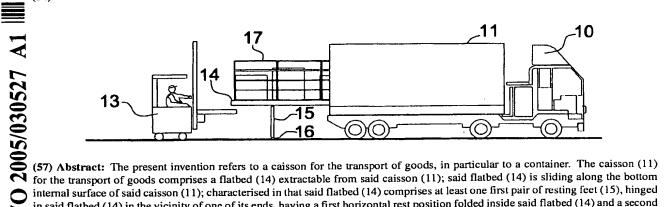

internal surface of said caisson (11); characterised in that said flatbed (14) comprises at least one first pair of resting feet (15), hinged in said flatbed (14) in the vicinity of one of its ends, having a first horizontal rest position folded inside said flatbed (14) and a second vertical working position, capable to sustain said flatbed (14) when said flatbed (14) is extracted from said caisson (11).



